# Field Service Spares Replacement Procedure – Level Cage Motor Kit, 2406

## Approval:

Signature	Date
Ron Chaffee / Signature on file.	1/8
John VanderJagt / Signature on file.	11-9-11
Stuart Broadfield / Signature on file.	11.02.11
	Ron Chaffee / Signature on file.  John VanderJagt / Signature on file.

## **Revision History**

Rev.	ECO	Description of Change	Date
X1	8878	Initial release	08-18-2011
A	9059	Clerical revisions	10-30-2011
<del></del>			
			L

1				
	Page 1 of 1	Sea Tel	Document No 135313 Rev X1	

Copyright © Sea Tel, Inc 2011 - The information contained in this document is proprietary to Sea Tel, Inc.. This document may not be reproduced or distributed in any form without prior written consent of Sea Tel, Inc.

## 1. Brief Summary:

Troubleshooting document for diagnosing a fault with and replacing the level cage motor on the 2406 antenna.

#### 2. Checklist:

- Verify Initialization
- Verify Pointing
- Verify Targeting

# 3. Theory of Operation:

Elevation drive occurs from offsetting the level cage which introduces error into the PCU's control loop, the elevation motor will then drive the axis to bring the level cage back to level, removing the error and in turn changing the elevation look angle of the antenna. If the level cage motor is defective it will prevent the system from targeting the correct elevation by not offsetting the level cage the correct amount and therefore causing the elevation targeting error.

A sign that the level cage motor is faulty is the system keeps finding the satellite at different elevation positions and the trims need adjusting to compensate for this, or the system mispoints completely and the look angle of the antenna doesn't correspond with the value displayed on the DAC. What's actually happening is the motor isn't offsetting the level cage properly, therefore the system isn't targeting correctly however the DAC will display the desired target position as there is no live feedback.

# 4. Verify Initialization:

- Power cycle the pedestal
  - 1. Brakes release (if applicable)
  - 2. Level cage drives to its end stop, then backs off exactly 45 degrees
  - 3. Elevation axis drives to level based on the level cages horizon reference
  - 4. Cross level axis drives to level based on the level cages horizon reference
  - 5. Unlimited azimuth systems drive clockwise until the home flaq and sensor make contact

Verify if the level cage motor drives correctly, if not then the system won't target 45 degrees of elevation during the initialization process.

If the ACU reports model "xxo3", the antennas No parameter needs calibrating and verifying that the PCU saves it correctly. A drive issue or pedestal error (error 8) requires further troubleshooting.

Page 1 of 5	Sea Tel	Document No 135313 Rev A

# 5. Verify Pointing:

Drive the antenna throughout its elevation range and verify it points correctly, targeting o, 45 and 90 degrees, making sure the reflector is at the correct position displayed on the DAC.


# 6. Verify Targeting:

If the antenna appears to point correctly, a more accurate way to verify this is to see if it can repeatedly target the correct elevation of a satellite. Trim the system to the correct elevation and then point the antenna away from the satellite, now target the desired satellite and verify the system targets to within 0.5 degrees of the correct elevation.

Any error in the above steps is an indication the level cage motor is defective.

## 7. Test the Motor:

The stepper motor can be verified by measuring resistance across the following connections:

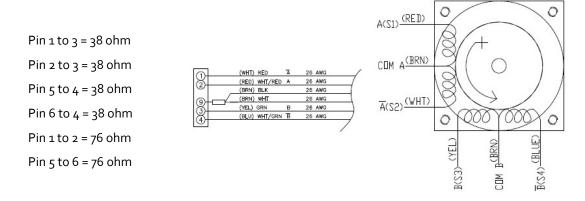


If one of the measuring points is open (no resistance) the motor is defective and needs to be replaced. Also measure from all the pins to ground (the metal case of the motor) they must be open, not shorted.

Page 2 of 5	Sea Tel	Document No 135313 Rev A

#### 8. Further Information:

Now the motor has been replaced verify the system initializes properly, has the correct range of motion and targets the correct elevation values (if the elevation trim was adjusted because of the targeting error this will need resetting).

If the targeting issue still persists there is the possibility that the driver for the level cage motor on the PCU motherboard has failed. Test the four transistors on the PCU motherboard for damage as per the below image.

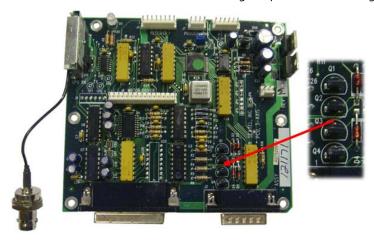

Set your multi-meter to the Diode setting and test between the pins of the transistors as per the following procedure and verify the results.

Pins 1 (+) and 2 (-) = LO

Pins 1 (+) and 3 (-) = 0.66V (+/- 0.03)

Pins 1 (-) and 3 (+) = LO

Pins 1 (-) and 2 (+) = 0.66V (+/- 0.01)

Pins 3 (-) and 2 (+) = 0.66V (+/- 0.01)

Pins 3 (+) and 2 (-) = LO



Any readings shorted to ground or out of the above tolerances mean the transistor is defective and the PCU needs to be replaced.

If the system is displaying a pedestal error (error 8) then there is a drive issue with the antenna and attention will need to be paid to the motor and motor driver for the relevant axis.

Page 3 of 5	Sea Tel	Document No 135313 Rev A

Copyright © Sea Tel, Inc 2011 - The information contained in this document is proprietary to Sea Tel, Inc.. This document may not be reproduced or distributed in any form without prior written consent of Sea Tel, Inc.

## 9. Replacing the Level Cage Motor:

#### 9.1. Tools.


- 2mm Flat Blade (Terminal) Screwdriver
- 7/64" Allen wrench/key
- Loctite 242

#### 9.2. Procedure.

Procedure for replacing the 2406 level cage motor, Sea Tel kit part number: 134927 (Motor part number: 124228-1).

# \*CAUTION: Power down the pedestal before following this procedure.

1. Using a 2mm flat blade screwdriver, undo the harness connection from the shielded level cage motor assembly.

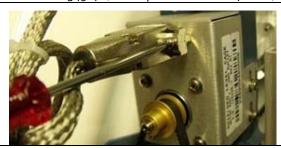

2. Using a 7/64" Allen wrench undo the four bolts securing the shielded level cage motor assembly to the pedestal and retain for future use. Remove the assembly.



3. Install the replacement level cage motor assembly onto the pedestal. Install it low enabling the belt to be slipped over the pulley with no stress on it. Install the four screws and star washers loosely with loctite 242.



4. Tension the belt by sliding the motor assembly by hand away from the level cage and tighten <u>two</u> of the four screws.



Page 4 of 5


Sea Tel

Document No 135313 Rev A

Copyright © Sea Tel, Inc 2011 - The information contained in this document is proprietary to Sea Tel, Inc.. This document may not be reproduced or distributed in any form without prior written consent of Sea Tel, Inc.

# Field Service Procedure - Level Cage Motor Kit, 2406

- 5. Increase the belt tension until the belt can only be easily twisted just ¼ turn with your fingers.
- 6. If the belt tension is too tight/lose adjust until correct and then secure the motor.
- 7. If the belt tension is correct tighten the two loose screws.







Page 5 of 5	Sea Tel	Document No 135313 Rev A
	COBHAM	